

TEKNİK ÖZELLİKLER

1/8” (DN 06) – 1-1/2” (DN 40)
Tek Akışkan Geçişli
Radyal Gövde Girişleri
Rulman Yataklama
Diş Bağlantılı
Alüminyum Gövde
Sert Krom Kaplı Paslanmaz Çelik Mil
FKM O-Ringli PTFE Keçe
Kendinden Destekli
Hava, Hidrolik Yağ, Soğutucu Fren Hidroliği ve Vakum Uygulamalarında Kullanılır

ÇALIŞMA LİMİTLRİ


Maksimum Hava Basıncı: 10 Bar
Maksimum Hidrolik Yağ Basıncı: 250 Bar
Maksimum Hava Sıcaklığı: 120 °C
Maksimum Hız (Kısa Dönem):
DN08 - DN25 ... 250 devir/dk
DN32 – DN40 ... 200 devir/dk

TECHNICAL FEATURES

1/8” (DN 06) – 1-1/2” (DN 40)
Single Fluid Transfer
Radial Inlets
With Bearing
With Thread Connections
Aluminum Housing
Hard Chrome Plated Stainless Steel Shaft
FKM O-Ring with PTFE Ring Seals
Self-Supported System
Applicable to Air,Hydraulic Oil,Coolant Brake Hydraulic and Vacuum

OPERATING RANGES

Maximum Air Pressure: 10 Bar
Maximum Hydraulic Oil Pressure: 250 Bar
Maximum Air Temperature: 120 °C
Maximum Speed (Short Term):
DN08 - DN25 ... 250 rev./min
DN32 – DN40 ... 200 rev./min

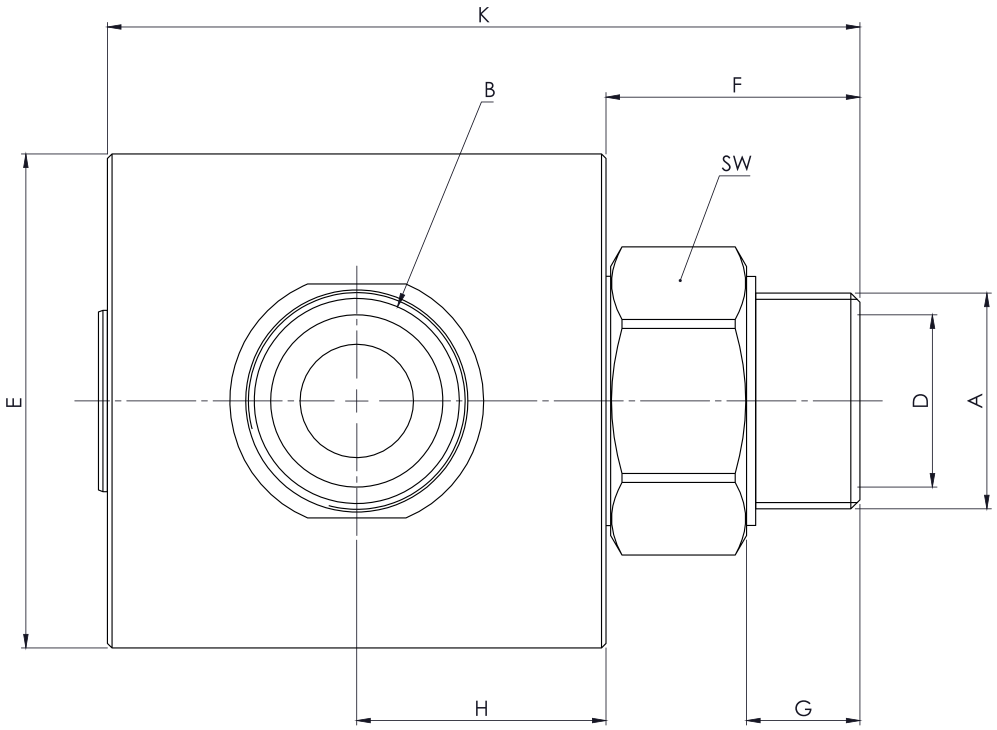

4000H SERİSİ HAVA & HİDROLİK YAĞ BAŞLIĞI / 4000H SERIES AIR & HYDRAULIC OIL ROTARY JOINT											
DN	Ürün Kodu Product No.	A	B	D	E	F	G	H	K	SW	Kg ≈
DN6	4012H-100-101	G 1/8 RH	1/8 NPT	5	39	24	10	22	70	18	0,2
	4012H-100-201	G 1/8 RH	G 1/8	5	39	24	10	22	70	18	0,2
DN8	4025H-100-103	G 1/4 RH	1/4 NPT	6	44	28	14	25	80	25	0,3
	4025H-100-203	G 1/4 RH	G 1/4	6	44	28	14	25	80	25	0,3
DN10	4037H-100-105	G 3/8 RH	3/8 NPT	9	44	30	16	25	82	25	0,3
	4037H-100-205	G 3/8 RH	G 3/8	9	44	30	16	25	82	25	0,3
DN15	4050H-100-107	G 1/2 RH	1/2 NPT	13	64	40	19	35	112	32	0,8
	4050H-100-207	G 1/2 RH	G 1/2	13	64	40	19	35	112	32	0,8
DN20	4075H-100-109	G 3/4 RH	3/4 NPT	19	69	40	19	38	118	40	1,1
	4075H-100-209	G 3/4 RH	G 3/4	19	69	40	19	38	118	40	1,1
DN25	4100H-100-111	G 1'' RH	1'' NPT	25	89	51	22	43	139	50	2,1
	4100H-100-211	G 1'' RH	G 1	25	89	51	22	43	139	50	2,1
DN32	4125H-100-113	G 1 1/4 RH	1 1/4 NPT	32	99	51	24	52	157	55	2,9
	4125H-100-213	G 1 1/4 RH	G 1 1/4	32	99	51	24	52	157	55	2,9
DN40	4150H-100-115	G 1 1/2 RH	1 1/2 NPT	38	109	56	25	55	168	60	3,7
	4150H-100-215	G 1 1/2 RH	G 1 1/2	38	109	56	25	55	168	60	3,7