
RT-L



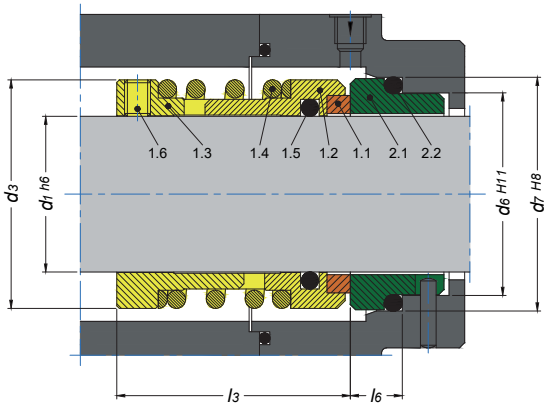

1.1.Döner Eleman Yüzeyi / Seal Face
1.2.Döner Yüzey Tutucu / Seal Face Holder
1.3.Döner Eleman Bileziği / Drive Collar
1.4. Yay / Spring
1.5.-2.2.O-Ring
1.6. Setskur / Set Screw
2.1.G-9 Sabit Eleman / Seat Face

ÖZELLİKLER

Tekli Salmastra
Balanssız
Dönme Yönüne Bağımsız
EN 12756 - DIN 24960

TECHNICAL FEATURES

Single Seal
Unbalanced
Bidirectional Seal
EN 12756 - DIN 24960

ÇALIŞMA LİMİTLERİ

Şaft Çapı (Shaft)
Basınç (Pressure)
Sıcaklık (Temperature)
Hız (Speed)
Eksenel (Axial)

OPERATING RANGES

20-100 mm
12 bar
-20 to +160 °C
20 m/s
± 1 mm

BİLEŞEN MALZEMELERİ

Döner Eleman (Seal Face)
Sabit Eleman (Seat)
Elastomerler (Elastomers)

COMPONENT MATERIALS

Car, SiC, TuC
Car, CrNi, SiC, Tuc
FKM, EPDM

SABİT ELEMANLAR

G-9

STATIONARY SEATS

Same as Left

UYGULAMA ALANLARI

Kağıt Endüstrisi
Proses Endüstrisi
Hamur Süspansiyonlar
Yüksek Viskoz Ortamlar

APPLICATIONS

Pulp and Paper Industry
Process Industry
Pulp Suspensions
High Viscose Media

RT-L Montaj Ölçüsü / Installation Dimension

d_1	d_3	d_6	d_7	l_3	l_6
20	34,0	29,0	35,0	41,0	11,5
22	36,0	31,0	37,0	41,0	11,5
24	38,0	33,0	39,0	43,0	11,5
25	39,0	34,0	40,0	43,0	11,5
28	42,0	37,0	43,0	45,0	11,5
30	44,0	39,0	45,0	45,0	11,5
32	46,0	42,0	48,0	45,0	11,5
33	47,0	42,0	48,0	45,0	11,5
35	49,0	44,0	50,0	49,0	11,5
38	54,0	49,0	56,0	53,0	14,0
40	56,0	51,0	58,0	55,0	14,0
43	59,0	54,0	61,0	55,0	14,0
45	61,0	56,0	63,0	55,0	14,0
48	64,0	59,0	66,0	55,0	14,0
50	66,0	62,0	70,0	60,0	15,0
53	69,0	65,0	73,0	61,0	15,0
55	71,0	67,0	75,0	61,0	15,0
58	76,0	70,0	78,0	63,0	15,0
60	78,0	72,0	80,0	63,0	15,0
63	81,0	75,0	83,0	63,0	15,0
65	84,0	77,0	85,0	67,0	18,0
70	90,0	83,0	92,0	68,0	18,0
75	95,0	88,0	97,0	72,0	18,0
80	100,0	95,0	105,0	72,0	18,2
85	107,0	100,0	110,0	77,0	18,2
90	112,0	105,0	115,0	77,0	18,2
95	119,0	110,0	120,0	82,0	17,2
100	124,0	115,0	125,0	82,0	17,2